

## **SmartNA-PortPlus**<sup>™</sup>

Scalable Network Packet Broker 1G/10G/25G/40G/100G

**DATA SHEET** 











The SmartNA-PortPlus<sup>™</sup> provides a scalable range from 48 ports to 194 ports of 1/10/25/40 and 100Gbps visibility, enabling users to interconnect different network protection and monitoring tools quickly and easily. Packaged in a compact single RU chassis the SmartNA-PortPlus<sup>™</sup> offers immediate value for today and an efficient path to the inevitable adds and changes for tomorrow.

Beyond server ready high speed connectivity for security and monitoring tools, the SmartNA-PortPlus<sup>™</sup> is also a feature rich traffic manager. Advanced features such as aggregation, filtering, graphical port mapping and load balancing of core network traffic allow users to leverage their tool investment.

SmartNA-PortPlus<sup>™</sup> is powered by Network Critical's unique Drag-n-Vu<sup>™</sup> software, a sophisticated computational engine with an intelligent and intuitive graphical user interface that enables fast, error-free configuration and management.

The fastest processing, highest density, most flexible combination of port speeds and simplest management make Network Critical's SmartNA-PortPlus™ the best choice for complete network visibility.

## Network Critical's innovative SmartNA-PortPlus™ Network Packet Broker bridges the gap between todays ultra high speed networks and existing management, monitoring and security tools.

Connect, add and change network protection and monitoring tools fast and easy with the uniquely flexible architecture of the SmartNA-PortPlus<sup>™</sup>. The base unit provides up to 48 ports of 1/10 Gbps access plus 6 ports of 100Gbps access in a nonblocking single RU chassis.

Adapting to users evolving needs, our upgraded unit adds 2 QSFP ports and offers SFP+ to SFP28 port upgrades for enhanced flexibility and scalability. With SmartNA-PortPlus™, your network grows seamlessly, accommodating up to 194 ports.

When more ports are required in the future, simply add another 48 port unit. The additional ports are connected to the base unit allowing traffic mapping, filtering and other features to function as a single unit. There is no need to change out, throw away or re-deploy the initial unit.

The same port speeds and rich features that are included in the base unit are all available as expansion units are added. New high speed tools can be added to 40/100 Gbps ports. Existing legacy tools can stay in service using lower speed 1/10/25 Gbps ports compatible with the processing capability of the tools.

Port flexibility and load balancing allow continued deployment of legacy monitoring and security tools. Scalable architecture provides an economical yet highly featured entry point and an efficient growth path.




KEY FEATURES	BENEFITS
High density, high performance scalable NPB: Next-generation network and server ready base unit 48 x 1/10G ports + 6 x 40/100G ports. Can be upgraded to 48 x 1/10/25G + 8 x 40/100G	Scalable to 194 ports of 1/10/25/40 & 100G. High port density saves rack space. The full range of port speeds protect against obsolescence
Intelligent and intuitive Drag-n-Vu™ user interface for fast, error free configuration, deployment and management	Single pane-of-management portal for the entire SmartNA-PortPlus™ system.
Non-blocking architecture, Line Rate System Throughput 1.8 Tbps	Performance to accomodate powerful network speeds
Aggregate, Filter and Load Balance core network traffic across existing and future tool portfolio	Single pane-of-management portal for the entire SmartNA-PortPlus™ system
Dual Hot Swap power supplies and fans for greater resilience	Robust data center solution



KEY FEATURES	BENEFITS
Quickly provisions new tools by eliminating SPAN port contention	Speeds up project completion
Session Aware Load Balancing by IP address, protocol, port, VLAN, MAC address or other parameters.	Leveraging Inline tools, enabling maximum network performance
SNMPv3 integrates with all major NMSs	Enabling greater tool management
Custom P-Tag functionality enables complex traffic processing workflows	Pinpoint tool optimization
Programmable architecture purpose-built to support workload density, emerging protocols and new technologies	Future-proofing the visibility solution
Support for RADIUS and TACACS+ Authentication, Authorization and	Enables for audit trail and accountability

Support for RADIUS and TACACS+ Authentication, Authorization and Accounting

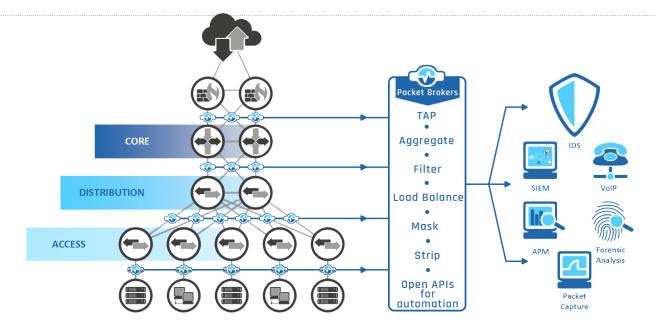

	BASE UNIT SPECIFICATIONS
Interfaces	48 x 1/10G ports + 6 x 40/100G ports Can be upgraded to 48 x 1/10/25G + 8 x 40/100G ODB: 1x 10/100/1000 Mbps Ethernet RJ-45 1x RS-232 Console RJ-45
Management	Web UI (Drag-n-Vu™) via HTTPS/HTML5, CLI via SSH/RS-232, SNMP v1/v2c/v3
Environment	Operating Temperature: 0°C to 45°C, Non-Operating Temperature: -20°C to 70°C, Relative Humidity: 20% to 80% (non-condensing)
Mechanical	Dimensions: (W x D x H) 440 x 434 x 44 mm Mounting: Surface or 19" rack mount (1U) Weight: 10kg (22 lbs)
Electrical	Power Consumption: 600W AC Input: 84-264VAC, 8-4A DC Input: -40VDC nominal -40 to -72VDC, 13.9A
Compliance	Emissions: EN55022 class A, Immunity: ESD: EN61000-4-2, Radiated: EN61000-4-3, EFT/Burst: EN61000-4-4, Surge: EN61000-4-5, Conducted: EN61000-4-6, Power frequency magnetic field: IEC 61000-4-8, Voltage dips & interruptions: IEC 61000-4-11, Harmonics: EN 61000-3-2, Flicker: EN 61000-3-3, Safety: EN60950-1" (same as SNA-X)
Performance	1.8Tbps throughput (full line rate performance)
MTBF	SNA-PP 6000: >582,692 hours



## As your business grows, scale-up your network

				-	i.		 -			-			 	 			 	
			-						J.	1	t	1						
•	•	• •				-	 	 ••	-•		 		 	 	-•	 	 	





SmartNA-PortPlus<sup>™</sup> NPB - 3RU

	PART NUMBERS - SmartNA-PortPlus Scalable Network Packet Broker Base Unit
6000-AC	SmartNA-PortPlus™ NPB - 48 x 1/10G SFP+, 6 x 40/100G QSFP, Aggregation, Filtering, Load Balancing, Drag-n-VU, Dual AC PSU
6000-AC-A0	SmartNA-PortPlus™ NPB - 48 x 1/10G SFP+, 6 x 40/100G QSFP, Aggregation, Drag-n-VU, Dual AC PSU
6000-DC	SmartNA-PortPlus™ NPB - 48 x 1/10G SFP+, 6 x 40/100G QSFP,, Aggregation, Filtering, Load Balancing, Drag-n-VU, Dual DC PSU
6000-DC-A0	SmartNA-PortPlus™ NPB - 48 x 1/10G SFP+, 6 x 40/100G QSFP, Aggregation, Drag-n-VU, Dual DC PSU
PortPlus HW Upgrade	SFP+ ports upgraded to SFP28, additional 2 x QSFP ports
FPK12	Feature Pack including Filtering (12 port license)
FFPK12	Full Feature Pack including Filtering & Load Balancing (12 port license)

Protect, monitor and secure your network now and into the future with the SmartNA-PortPlus™ Network Packet Broker. For more information about the SmartNA-PortPlus™, please visit <u>www.networkcritical.com</u>

For quotes and inquiries, please contact sales@networkcritical.com

This document is for informational purposes only. The information in this document, believed by Network Critical to be accurate as of the date of publication, is subject to change without notice. Network Critical assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2019 Network Critical Solutions Ltd. All Rights Reserved.



www.networkcritical.com